


SIMB-A01

Intel® Core™2 Quad LGA775/ Core™2 Duo ATX with VGA, 4 COM and DUAL LAN

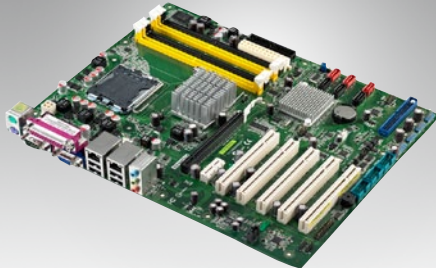

Features

- Socket 775 supports Intel® Core™2 Quad FSB 1333 MHz CPU
- Intel Q35 + ICH9R chipset
- Four 240-pin DDR2 800 MHz up to 8 GB
- Intel Graphics Media Accelerator 3100
- Realtek ALC888, 5.1 + 2 channel HD streaming audio
- Dual Realtek RTL8111C Gigabit LAN
- 1 PCIe x16, 1 PCIe x1, 5 PCI
- 4 COM (5/12 V), 12 USB, 6 SATA II, 1 IDE
- TPM 1.2, 16-bit GPIO
- Supports RAID 0, 1, 5, 10




CE FCC

Specifications

Processor System	CPU	Intel Core2 Quad	Intel Core2 Duo	Intel Pentium Dual-Core	Intel Celeron
	Max. Speed	Q9400 2.66 GHz	E8400 3.0 GHz	E6500 2.6 GHz	440 2.0 GHz
	L2 Cache	6 MB	6 MB	2 MB	512 KB
	Chipset	Intel Q35 + ICH9R			
	BIOS	AMI 32 Mbit , SPI			
	Front Side Bus	800/1066/1333 MHz			
Expansion Slots	PCI	32-bit/33 MHz, 5 slot			
	PCIe x16	4.0 GB/s per direction, 1 slot			
	PCIe	250 MB/s per direction, 1 slot			
	Mini-PCIe	-			
Memory	Technology	Dual channel DDR2 667/800 MHz			
	Max. Capacity	8 GB			
	Socket	4 x 240-pin DIMM			
Graphics	Controller	Intel Graphics Media Accelerator 3100 integrated			
	VRAM	Intel DVMT 4.0 supports up to 284 MB Video Memory			
	VGA	Yes, on board GMA 3100			
	LVDS	Through ADD2 LVDS Card			
	DVI	Through ADD2 LVDS Card			
	HDMI	Through ADD2 HDMI Card			
	Dual Display	-			
Ethernet	Interface	10/100/1000 Mbps			
	Controller	GbE-LAN1: Realtek RTL8111C , GbE-LAN2: Realtek RTL8111C			
	Connector	RJ-45 x 2			
SATA	Max Data Transfer Rate	300 MB/s			
	Channel	6			
EIDE	Mode	ATA 100/66/33			
	Channel	1 (max. 2 devices)			
Rear I/O	VGA	1			
	DVI	-			
	Ethernet	2			
	USB	4			
	Audio	3 (Line-out, Line-in, Mic-in)			
	Parallel	1 (LPT)			
	Serial	1 (RS-232)			
	PS/2	2 (1 x keyboard and 1 x mouse)			
Internal Connectors	USB	8			
	Serial	3 (1 x RS-232/422/485 and 2 x RS-232)			
	IDE	1			
	SATA	6 (SATA II)			
	Parallel	-			
	GPIO	16-bit (8-bit DI and 8-bit DO)			
Watchdog Timer	Output	System reset			
	Interval	Programmable 1~ 255 sec/min			
Security	TPM	Onboard TPM 1.2 by Infineon SLB9635			
Power Requirement	Power On	+12 V	+5 V	+3.3 V	5 Vsb
		3.52	3.58	2.86	0.74
Environment	Temperature	Operating		Non-Operating	
		0 ~ 50° C (32 ~ 122° F)		-20 ~ 70° C (-4 ~ 158° F)	
Physical Characteristics	Dimensions	305 x 244 mm (12" x 9.6")			

Block Diagram

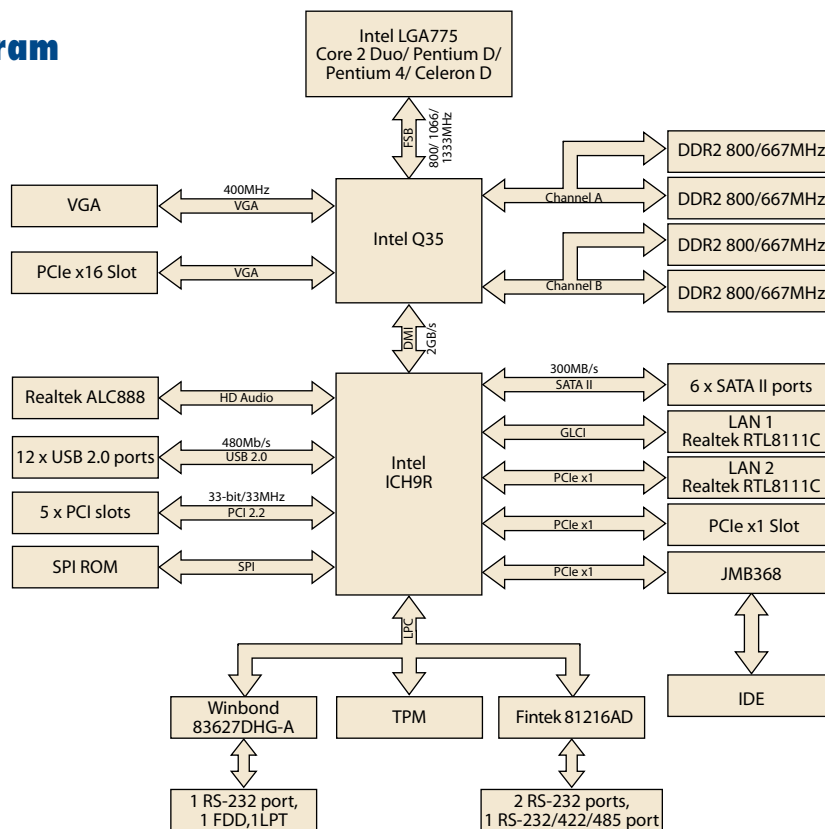


Ordering Information

P/N	CPU	Chipset	VGA	GbE	USB	COM	SATA
SIMB-A01-6G200A1E	Intel Core 2 Quad / Core 2 Duo / Pentium / Celeron	Intel Q35 + ICH9R	1	2	12 (4 Rear, 8 Internal)	4 RS-232 (1 Rear, 3 Internal)	6 SATA II

Note: Minimum order quantity is 200 pieces

I/O View

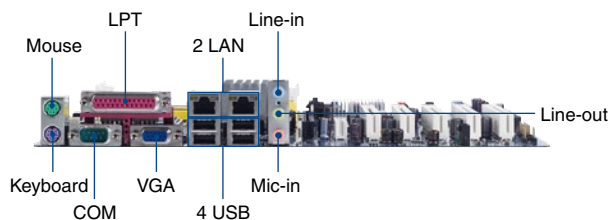

Packing List

Description	Quantity
SATA cable kit (SATA/Power)	1
I/O shield	1
Startup manual	1 (per 10 units)
Driver CD	1 (per 10 units)

Optional Accessories

Part Number	Description
196002203T000	LGA775 CPU cooler for 2U chassis
1700002204	USB cable with two ports, 27 cm
1700003195	USB cable with two ports, 17.5 cm
1700008461	USB cable with two ports, 30.5 cm